
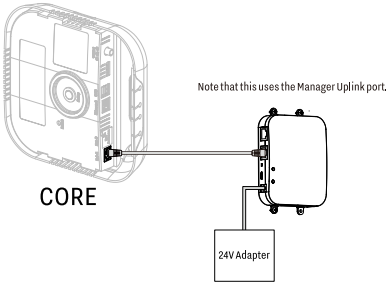
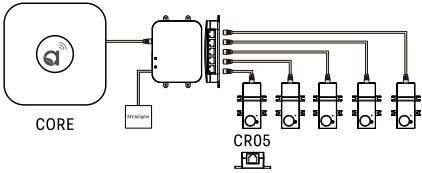






⚠ WARNING: May result in serious injury or death. Turn off power at circuit breaker before installing the unit.

Attention: pour éviter un incendie, un choc électrique ou la mort. Coupez l'alimentation au disjoncteur ou au fusible et testez que l'alimentation est coupée avant le câblage

RTR INSTALLATION INSTRUCTIONS

Step 1:Secure the RTR with self-tapping screws to secure solid surface.	Step 2:Please use CAT5e or better quality cables and connect the RTR to the CORE using the EXT-A port on the CORE.	Step 3:Connect the RTR to the CR05. Note: A maximum of 5 CR05 units can be connected to one RTR.
		


CR05 INSTALLATION INSTRUCTIONS

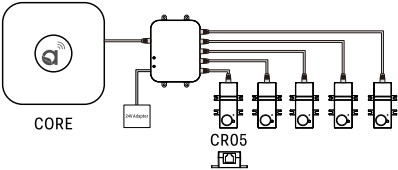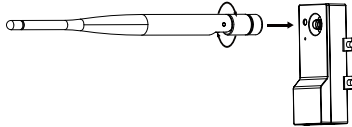Step 1:Secure the CR05 with self-tapping screws to secure solid surface.	Step 2:Use CAT5e or better quality cables to connect CR05 to the RTR. Note: A maximum of 5 CR05 units can be connected to one RTR.	Step 3:Rotate the antenna clockwise and tighten it onto the CR05.
		
Step 4:Reverse the angle such that the antenna doesn't cross over the CR05.		
		

After completing the installation mentioned above, please open the Keilton APP and search for the CR05 link. For detailed instructions, refer to the Keilton APP user guide.

Warning or Note: Users should not mount CR05 to or around anything that will cause poor signal quality. IE, don't install the CR05 on metal beams, ducts, etc.

WIRING

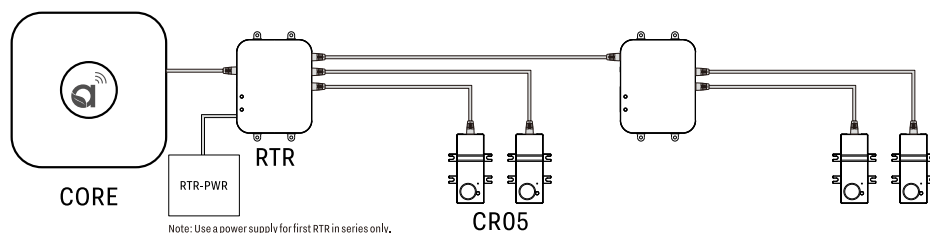

Note

- 1.The maximum length of the network cable between the CORE and the RTR is 10M.
- 2.Total amount of cable used between all RTR's and CR05's may not exceed 300 meters.
- 3.Multiple RTR devices can be added and connected to multiple CR05 units.

TIPS: This Bluetooth device is compatible with Keilton lighting control system only.

How to Install Keilton APP?

Scan below QR code for downloading the APP.



How to Control Lights with a Phone?

Scan to download Keilton APP instruction



WARRANTY INFORMATION

Our company warranties this product to be free of defects in materials and workmanship for a period of five(5) years. There are no obligations or liabilities on the part of our company for consequential damages arising out of, or in connection with, the use or performance of this product or other indirect damages with respect to loss of property, revenue or profit, or cost of removal, installation or reinstallation.

Contact: sales@litetrace.com